





HIGH GLOSS
SERIES

600X
600MM

LGF[®]
TILES

LET YOUR SURFACE
EXUDE SHINE
AND ELEGANCE

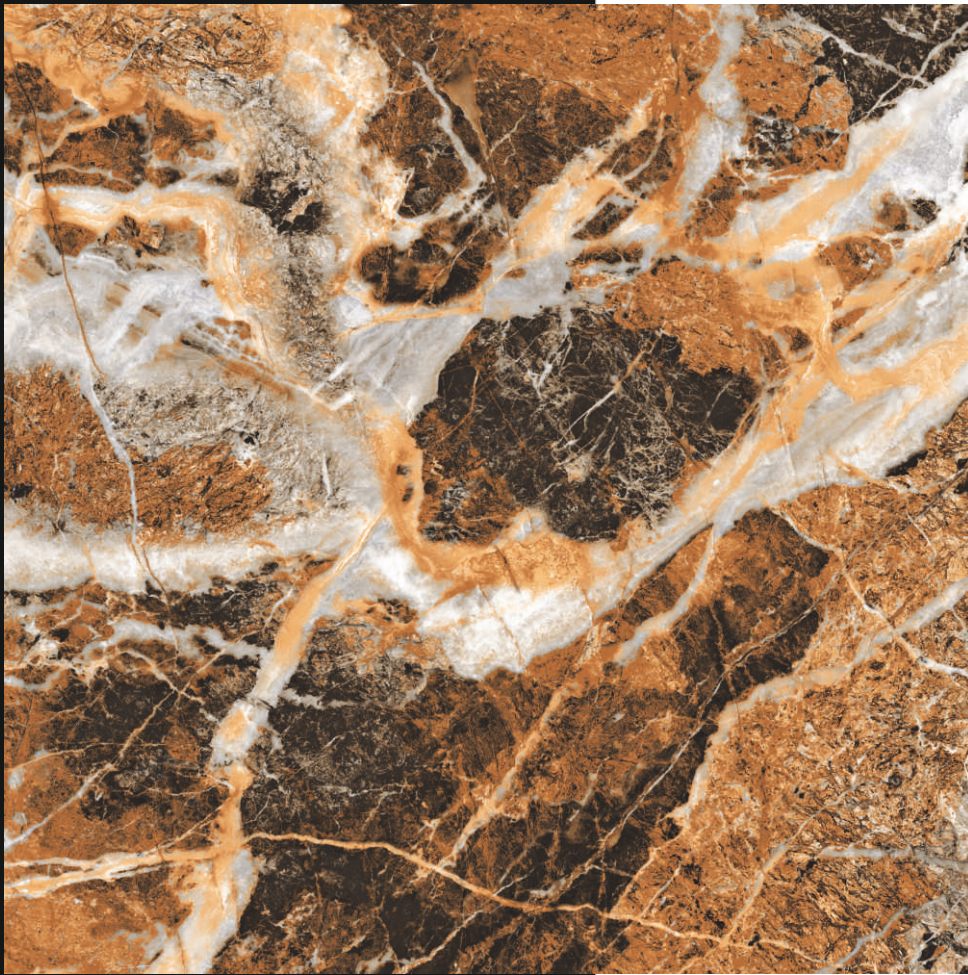

AMAZON GOLD

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
S E R I E S





600X600MM



600X600MM

AMAZON GOLD

HIGH GLOSS
SERIES

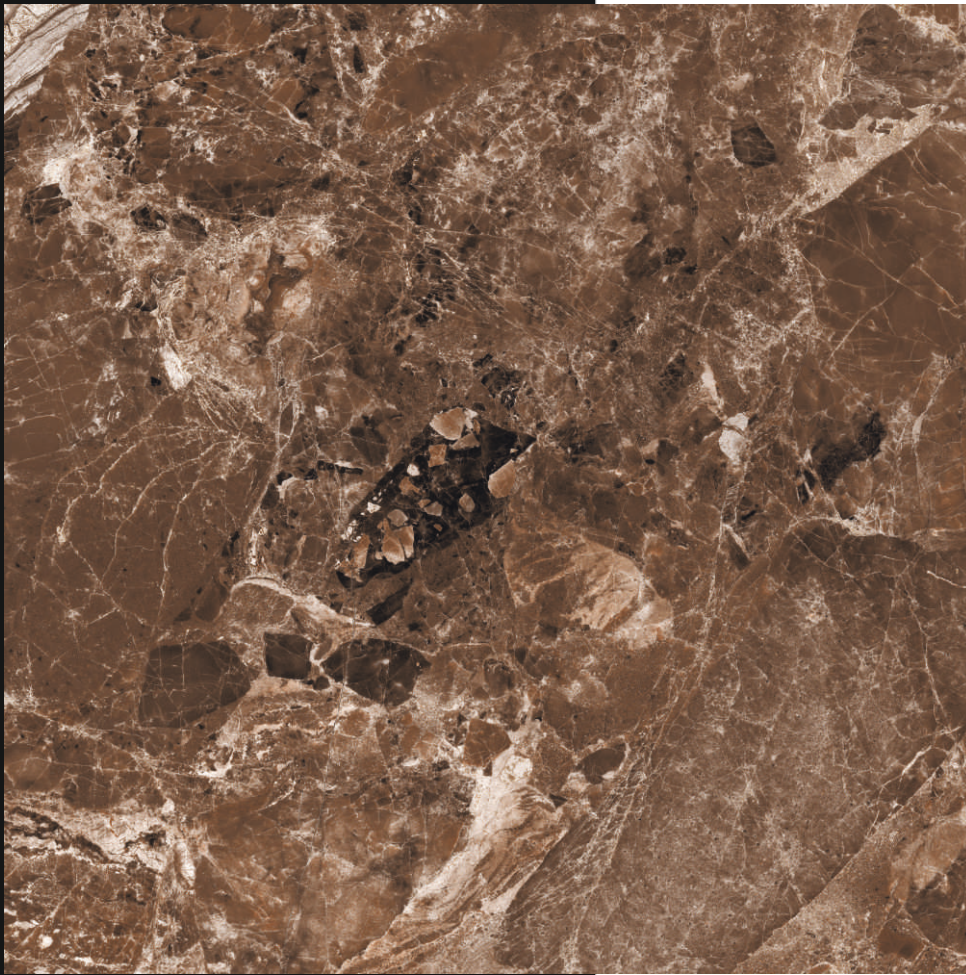

CARACUS COFFEE

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
S E R I E S





600X600MM



600X600MM

CARACUS COFFEE

HIGH GLÖSS
SERIES

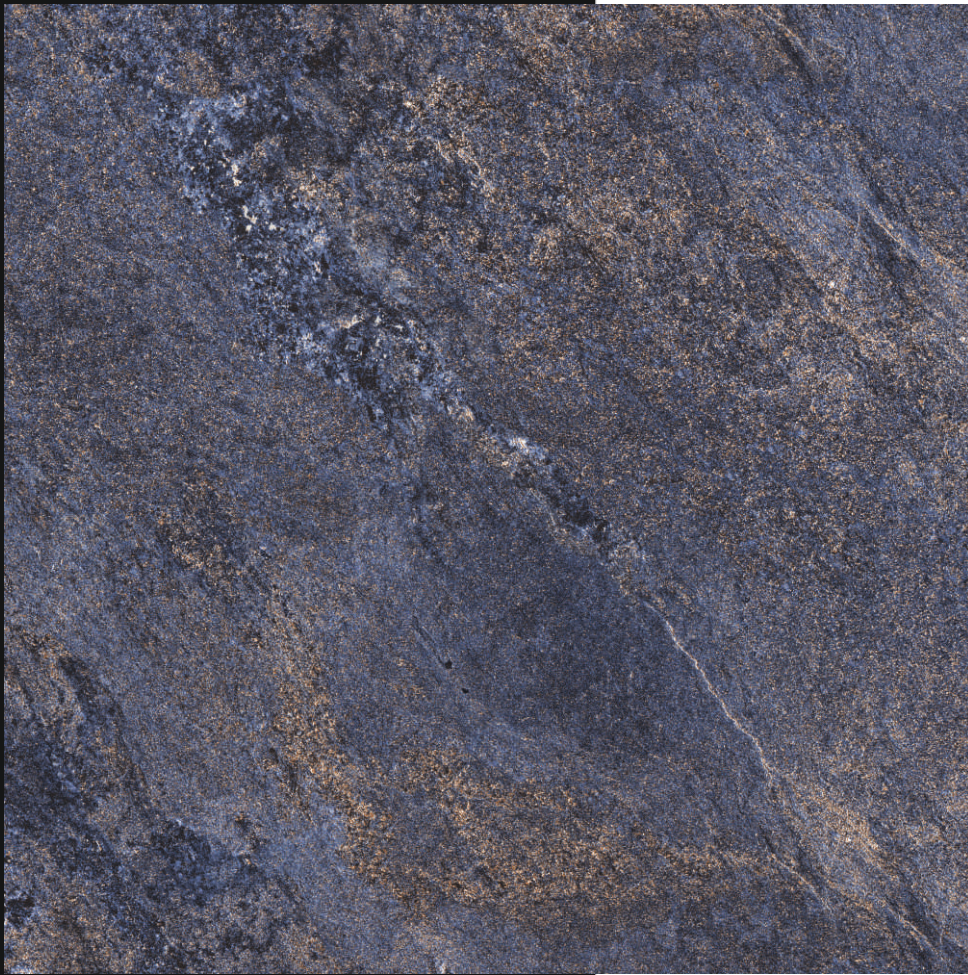

COSMIC BLUE

RANDOM PHASE - 06

LGF[®]
TILES

HIGH GLÖSS
S E R I E S




600X600MM



600X600MM

COSMIC BLUE

HIGH GLÖSS
SERIES

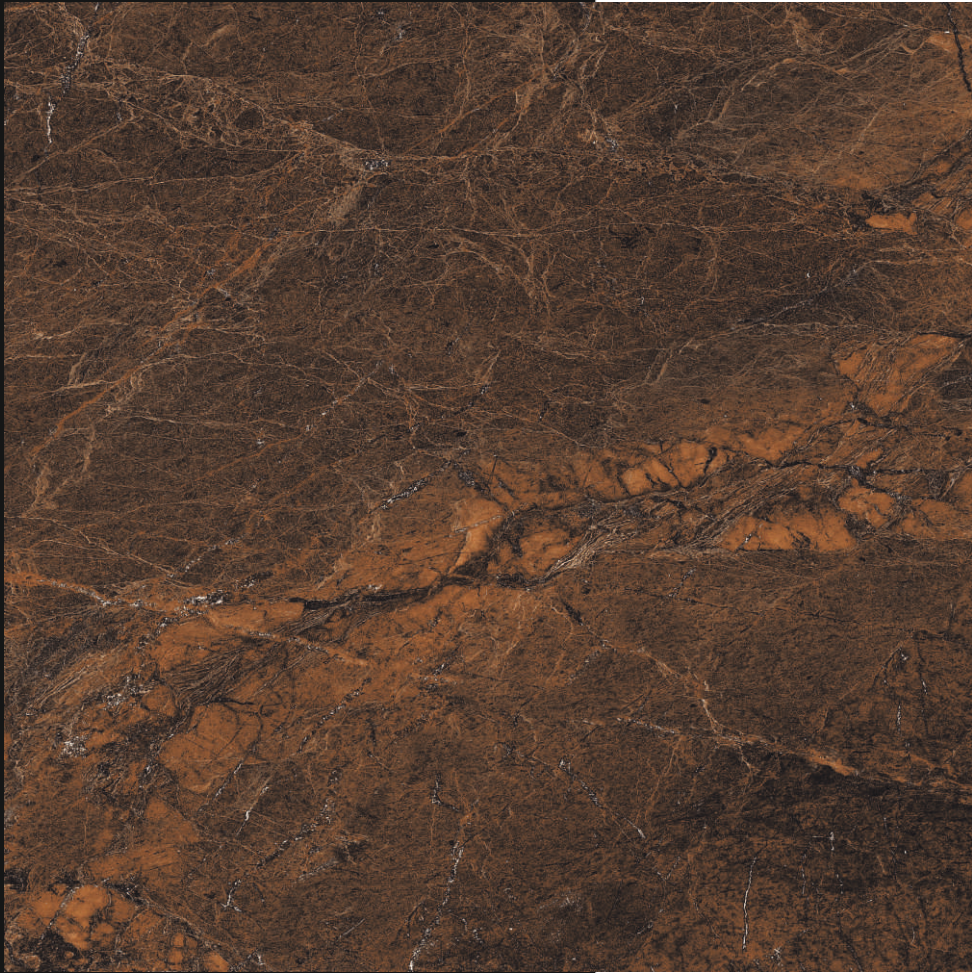

DUNCAN BROWN

RANDOM PHASE - 03

LGF[®]
TILES

HIGH GLÖSS
S E R I E S

600X600MM







**Never
too**

**L
A
T
E**

600X600MM

DUNCAN BROWN

HIGH GLÖSS
SERIES

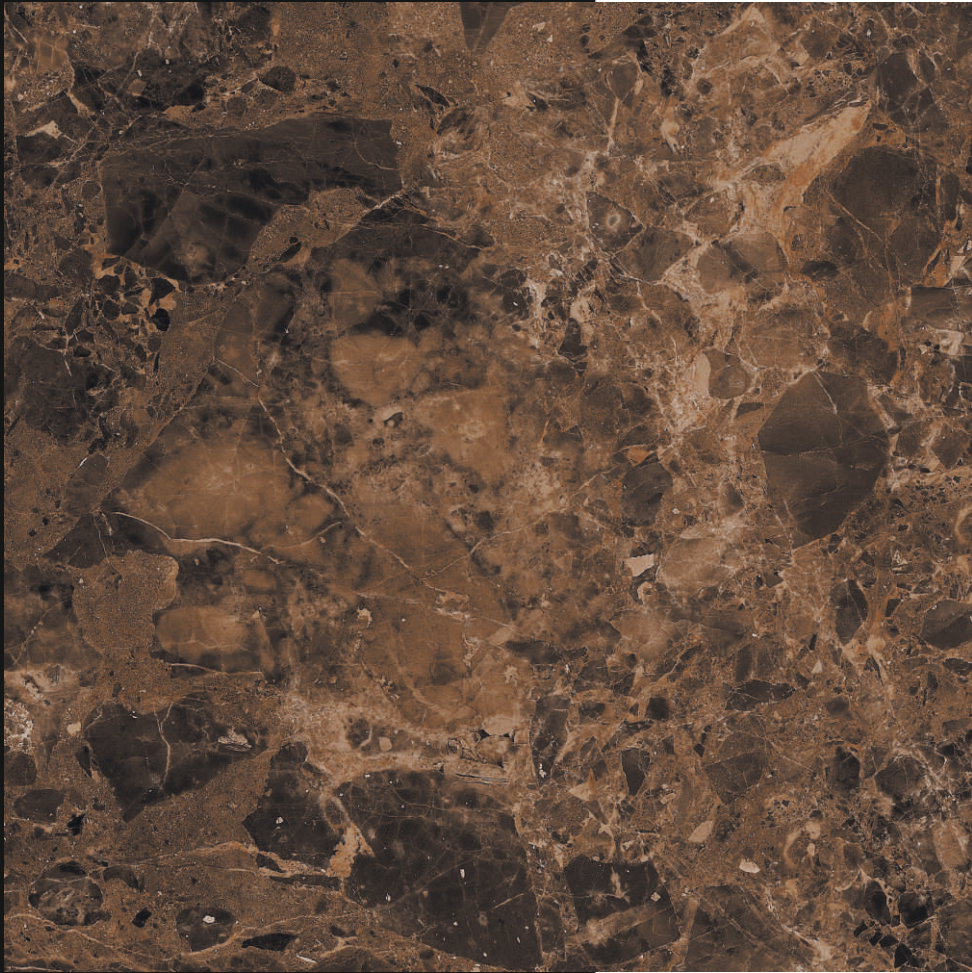

EMPRADORE COFFEE

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
S E R I E S





600X600MM



600X600MM

EMPRADORE COFFEE

HIGH GLÖSS
SERIES

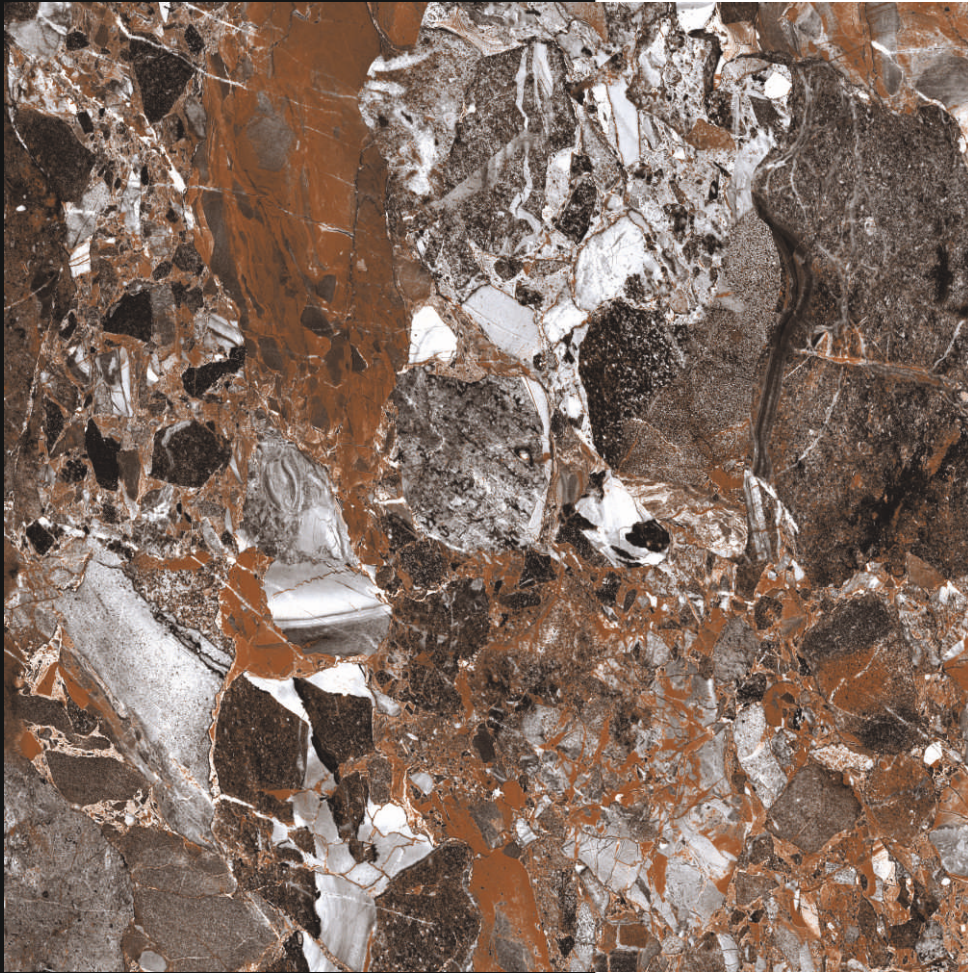

ESTONIA

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
S E R I E S


600X600MM



600X600MM

ESTONIA

HIGH GLOSS
SERIES

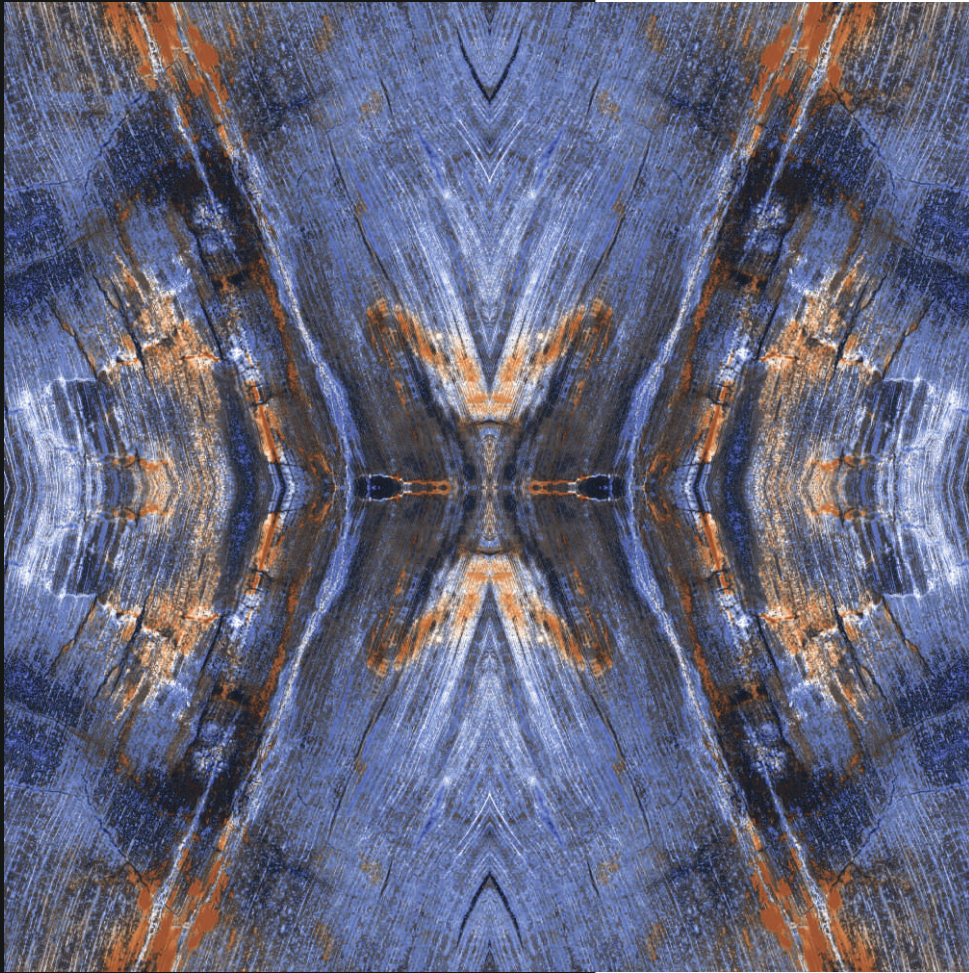

GALAXY BLUE

LGF[®]
TILES

HIGH GLÖSS
S E R I E S





600X600MM



600X600MM

GALAXY BLUE

HIGH GLÖSS
SERIES

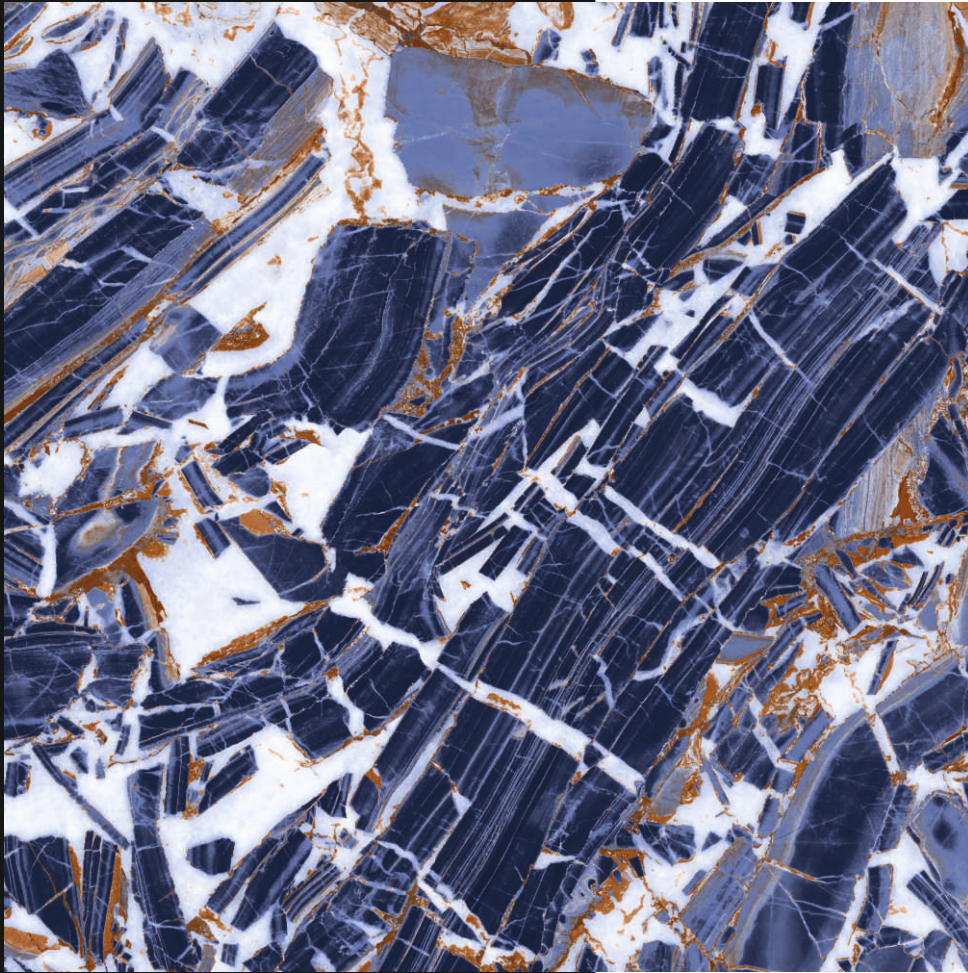

JAKARTA BLUE

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
S E R I E S





600X600MM



600X600MM

JAKARTA BLUE

HIGH GLOSS
SERIES

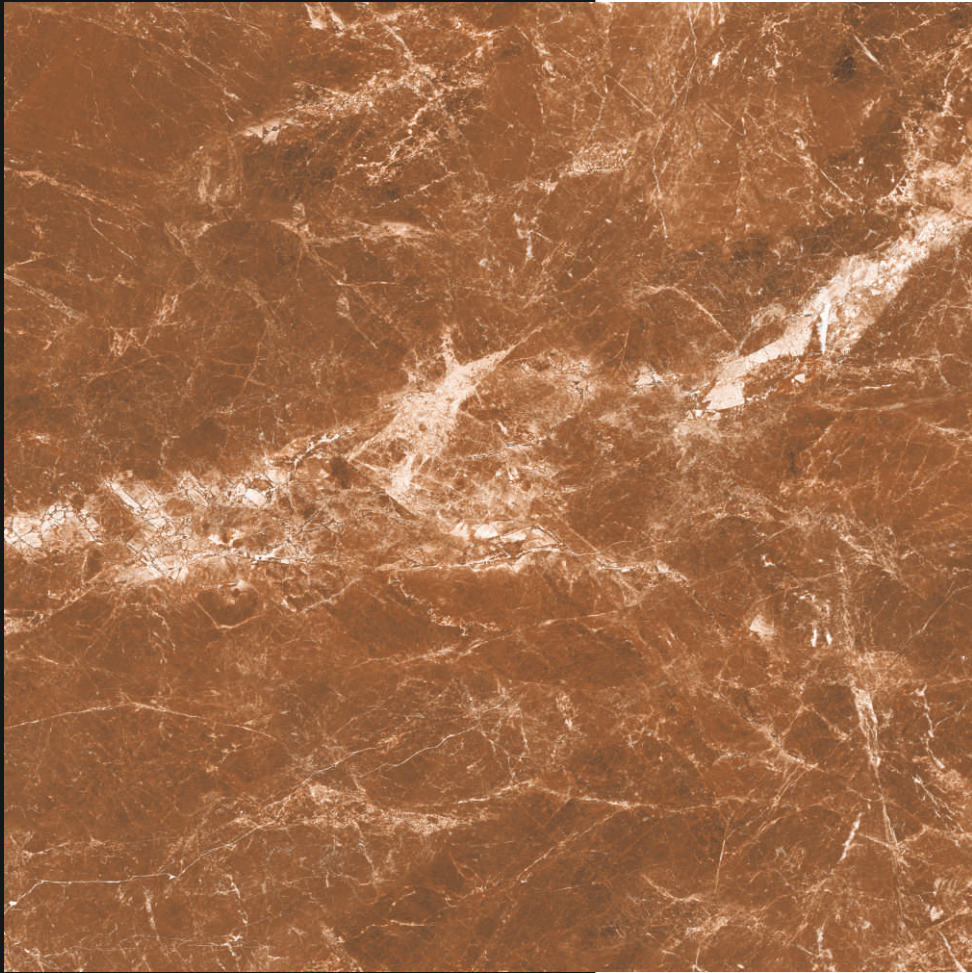

JUPITER BROWN

RANDOM PHASE - 04



HIGH GLÖSS
S E R I E S





600X600MM



600X600MM

JUPITER BROWN

HIGH GLÖSS
SERIES

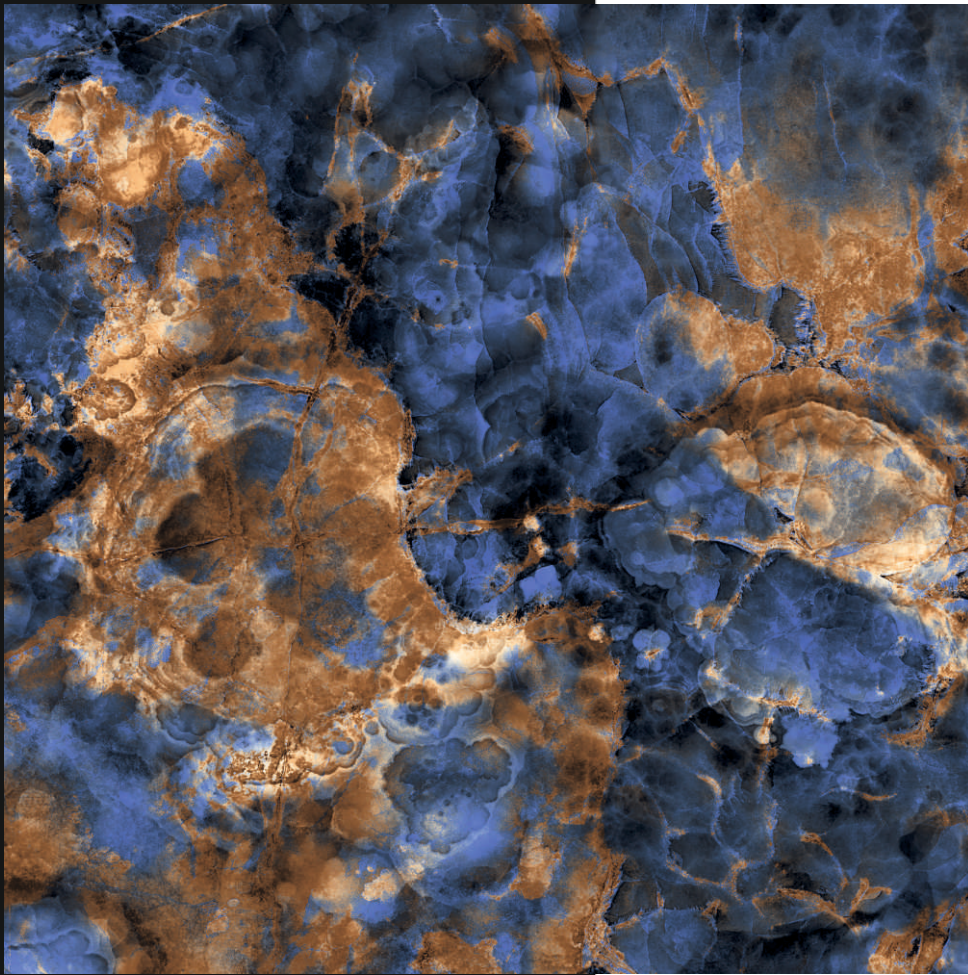

LAZURITE BLUE

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
S E R I E S



600X600MM



600X600MM

LAZURITE BLUE

HIGH GLÖSS
SERIES



MEXICAN CHOCO

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
S E R I E S




600X600MM



600X600MM

MEXICAN CHOCO

HIGH GLÖSS
SERIES

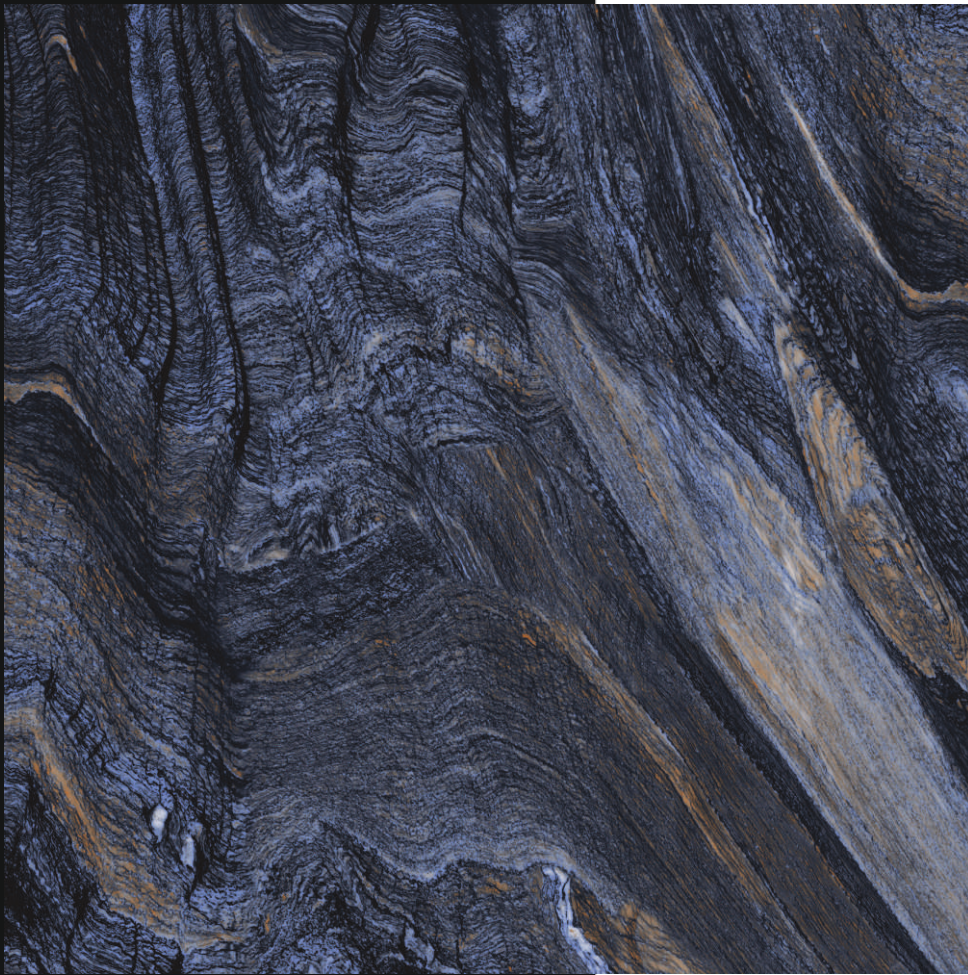

MOUNTAIN BLUE

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
SERIES




600X600MM



600X600MM

MOUNTAIN BLUE

HIGH GLOSS
SERIES

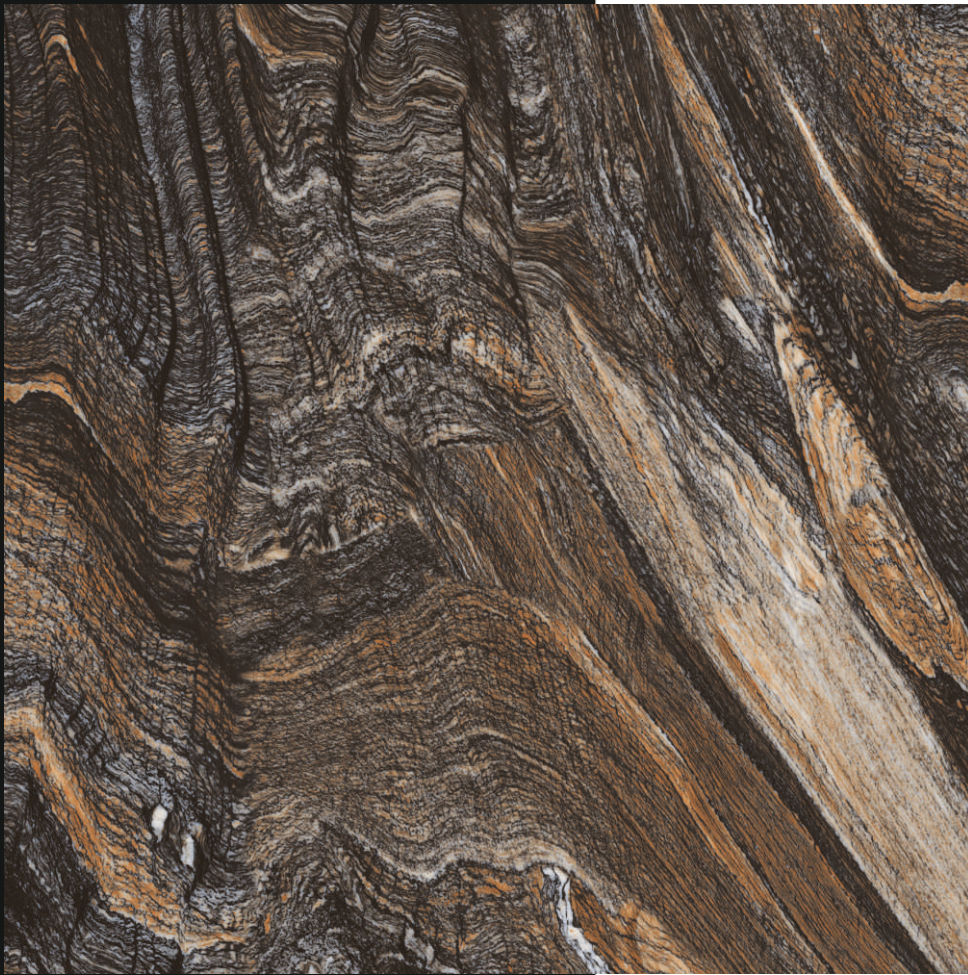

MOUNTAIN BROWN

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
S E R I E S




600X600MM



600X600MM

MOUNTAIN BROWN

HIGH GLÖSS
SERIES

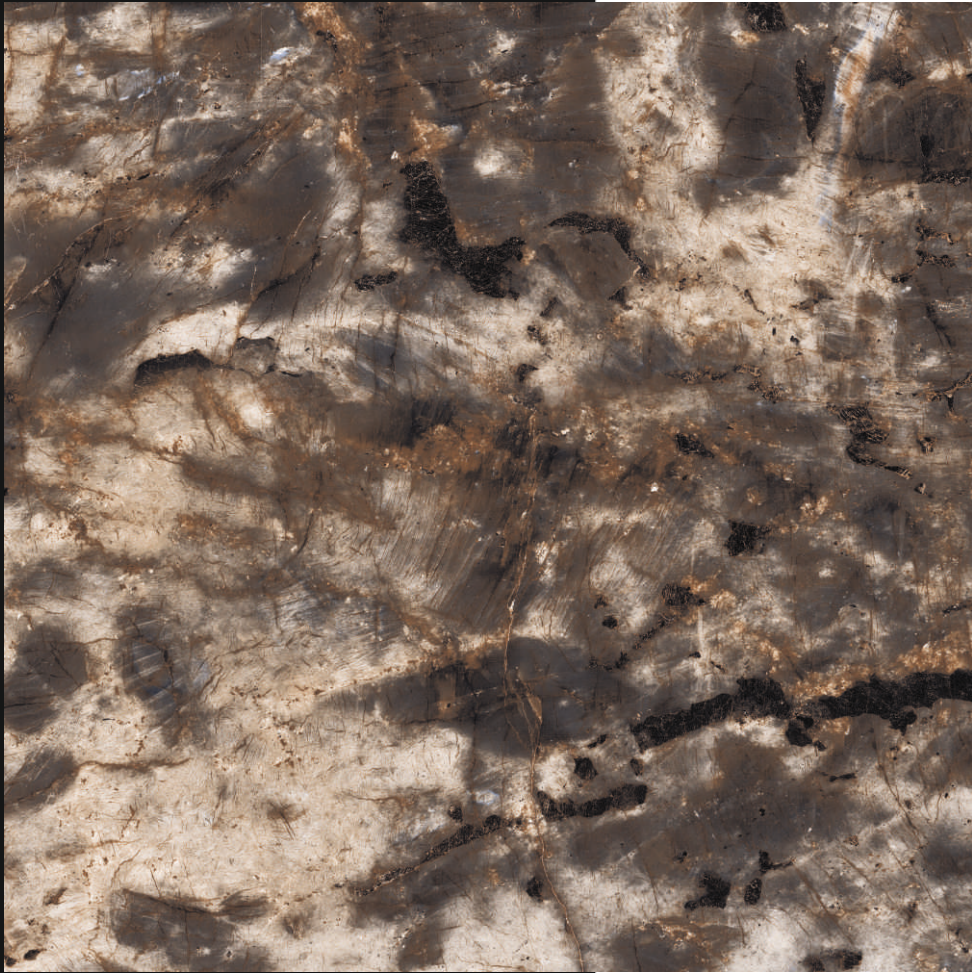

RADIANT GREY

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
S E R I E S


600X600MM



600X600MM

RADIANT GREY

HIGH GLÖSS
SERIES

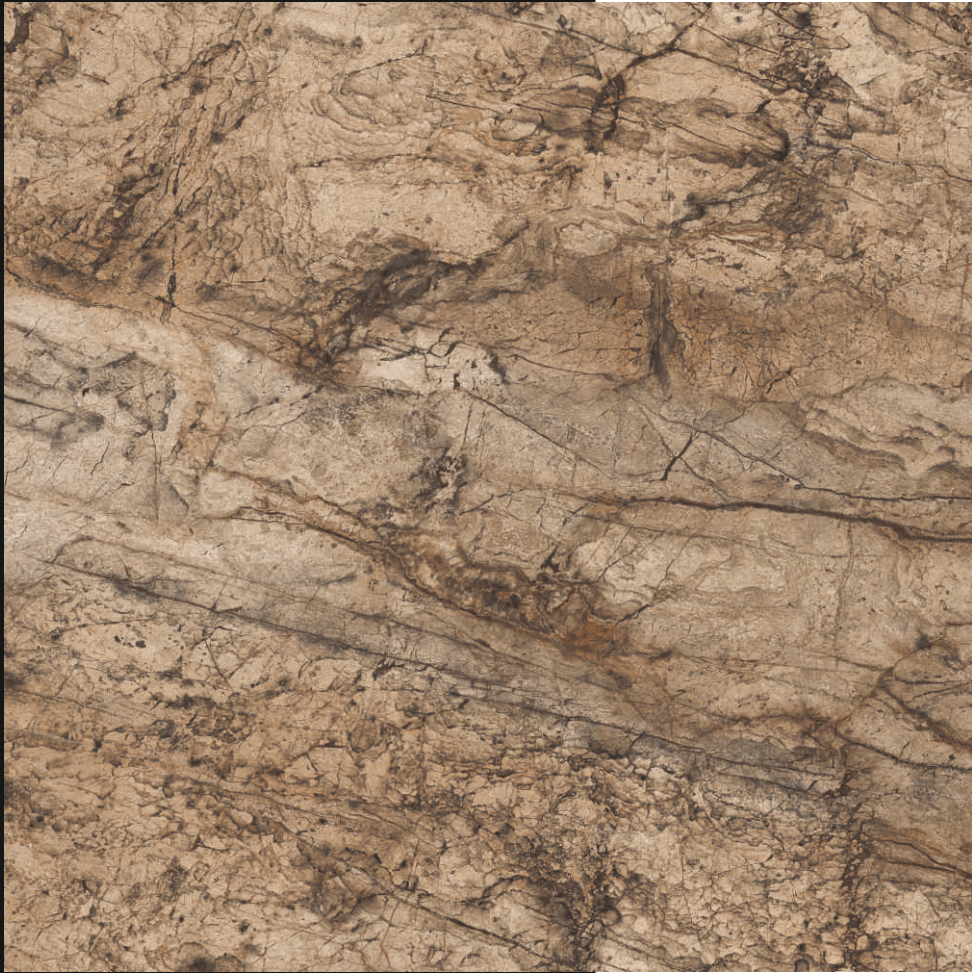

SILVER RIVER

RANDOM PHASE - 12

LGF[®]
TILES

HIGH GLÖSS
S E R I E S





600X600MM



600X600MM

SILVER RIVER

HIGH GLÖSS
SERIES

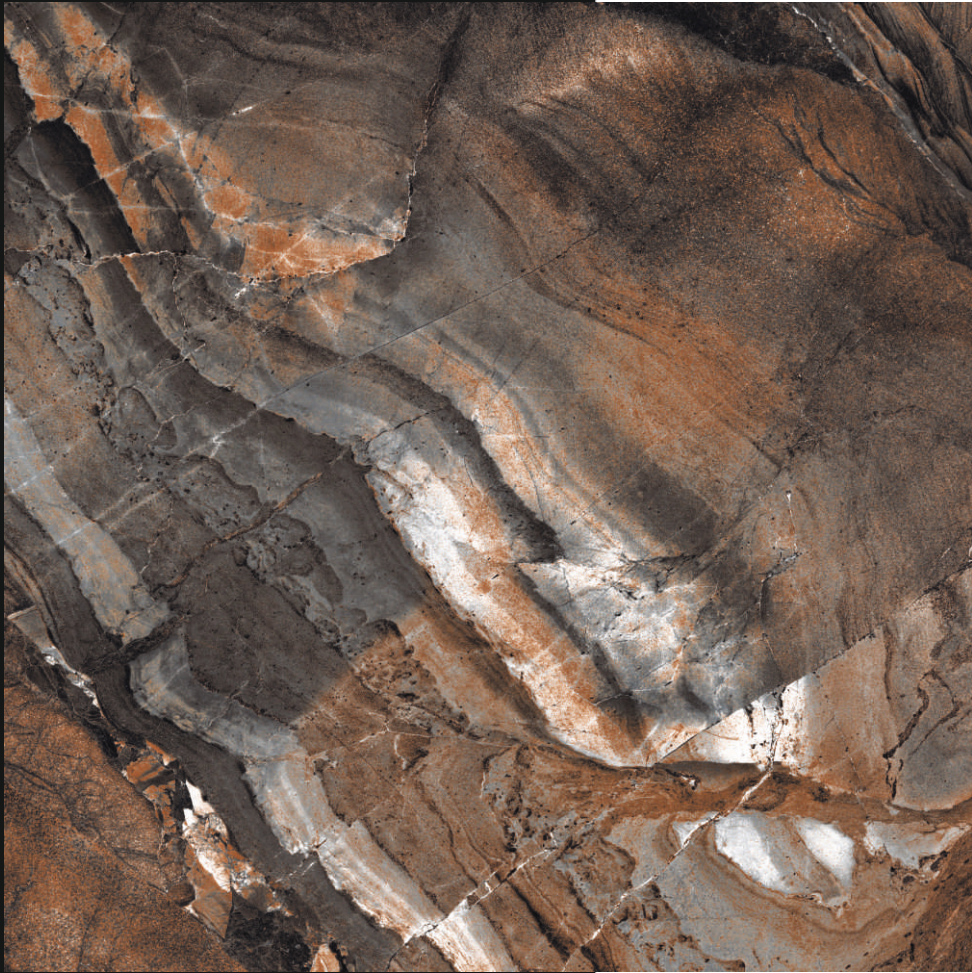

VENUS BROWN

RANDOM PHASE - 04

LGF[®]
TILES

HIGH GLÖSS
S E R I E S

600X600MM



600X600MM

VENUS BROWN

HIGH GLÖSS
S E R I E S

SPECIFICATIONS

Work Size		Avg. Weight Per Box. (Kgs.)	No. of Tiles Per Box	Coverage Areas Per Box
Dimensions (In mm)	Thickness (in mm)			
600x600 (Digital)	8.5	27	4 Pcs.	1.44 Sq. meter (15.5 Sq. Foot)

Conformity of LGF TILES to Indian Standards (Group B II a) IS:15622:2017				
Sr. No.	CHARACTERISTICS	IS: 15622:2017	Our Specification	Method of Testing
1	Deviation in Length & Width	Max. ± 0.1 %	Max. ± 0.1 %	IS : 13630-1
2	Deviation in Thickness	Max. ± 5.0 %	Max. ± 3.0 %	IS : 13630-1
3	Deviation in Straightness of sides	Max. ± 0.1 %	Max. ± 0.03 %	IS : 13630-1
4	Deviation in Rectangularity	Max. ± 0.1 %	Max. ± 0.04 %	IS : 13630-1
5	Surface Flatness	Max. ± 0.5 %	Max. ± 0.04 %	IS : 13630-1
6	Surface Quality	Min. 95% free from visible defects.	Min. 99% free from visible defects.	IS : 13630-1
7	Water Absorption	Avg. $3 < E \leq 6\%$ Individual max. 6.2 %	Avg. $2 < E \leq 6\%$ Individual max. 6.0 %	IS : 13630-2
8	Scratch Hardness (Moh's Scale)	Min. 4	Min. 5	IS : 13630-13
9	Abrasion Resistance	Class II Min.	Class III Min.	IS : 13630- 11
10	Crazing Resistance	4 Cycle at 7.5 bar min	4 Cycle at 7.5 bar Min.	IS : 13630- 11
11	Modulus of Rupture N/mm ²	Avg. 22, Individual 20, Min	Avg. 36 , Individual 35 Min.	IS : 13630 - 6
12	Breaking Strength, in N	600. Min. for thickness < 7.5mm 1000, Min. for thickness ≥ 7.5 mm	1670 Min.	IS : 13630- 6
13	Chemical Resistance	Required if agreed	Resistance to all acids and alkalis (except hydrochloric acid, Citric acid & Resistance to Alkali Potassium Hydroxide)	IS : 13630- 8
14	Thermal Shock Resistance	10 Cycles, Min.	10 Cycles Min.	IS : 13630- 5
15	Resistance to Household Chemicals	Class AA, Min.	Class AA Min.	IS : 13630- 8
16	Resistance to staining	Class 1, Min.	Class 1 Min.	IS : 13630- 8

Note

*All technical features stated in leaflets, In master brochure are meant to be an indication of an average of figures recorded within a span (determined by international) in several production runs, therefore a slight discrepancy in quality figures of a certain batch in relation to these figures cannot be considered a production failure.

APPLICATION



Multiplex



Hospital



Hotel



Airport



Home



Bank



Super Market



Industry



Religious Place



Gymnasium



Dance Mall



School